



ONE
hundred
percent
made in
ITALY


RR-TS

TESTA SFERICA



RR-TF

TESTA TAGLIARADICI

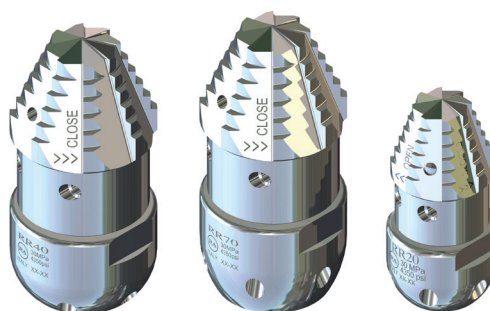

Ugello sturatubi rotante acciaio inox

i Caratteristiche Tecniche
• Acciaio Inox ad alta resistenza

Codice RR-TS TESTA SFERICA	Codice RR-TF TESTA TAGLIARADICI	Fattore di portata	N° fori	Massa		Entrata
				gr	oz	
25.1370.00	25.1246.00	-	10	310	11	G 1/2 F
25.1370.20	25.1246.20	20	10	327	11,53	G 1/2 F
25.1370.30	25.1246.30	30	10	330	11,64	G 1/2 F
25.1375.30	25.1247.30	30	10	845	29,81	G 3/4 F
25.1375.40	25.1247.40	40	10	845	29,81	G 3/4 F
25.1380.50	25.1249.50	50	10	820	28,92	G 1" F
25.1380.70	25.1249.70	70	10	810	28,5	G 1" F

Caratteristiche comuni

Pressione Nominale		Temperatura Nominale		Materiale
Bar-MPa	psi	°C	°F	
300-30	4350	160	320	Acciaio inossidabile

Ugelli intercambiabili per rotazione e spinta

Codice	Fattore di portata	Entrata	Ø
25.1250.51	015	M6x1	0,75 mm
25.1251.51	025	M6x1	1,00 mm
25.1252.51	035	M6x1	1,25 mm
25.1255.51	055	M6x1	1,5 mm
25.1257.51	07	M6x1	1,75 mm
25.1258.51	075	M6x1	1,8 mm
25.1259.51	08	M6x1	1,9 mm
25.1260.51	10	M6x1	2,00 mm
25.1262.51	11	M6x1	2,25 mm
25.1263.51	12	M6x1	2,35 mm
25.1265.51	15	M6x1	2,5 mm

P.A. S.p.A. Equipaggiamenti tecnici del lavaggio

Via Milano, 13 - 42048 Rubiera, Reggio Emilia - Italy

Tel +39.0522.623611 Fax +39.0522.629600 info@pa-etl.it www.pa-etl.it